


# Technical data sheet

## Screw plug, metric thread

Item number: 2090511

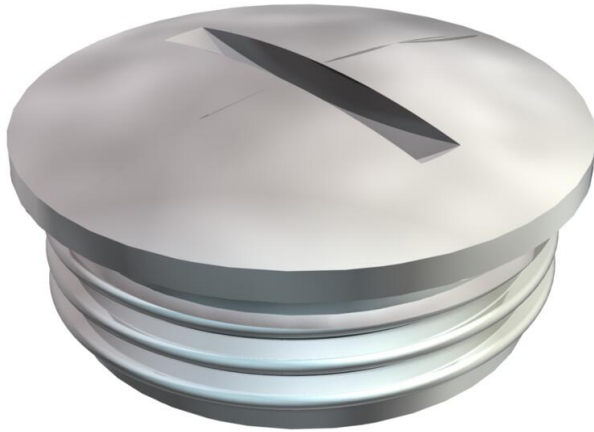

Screw plug N in accordance with DIN 46320, with metric thread to DIN EN 60423 or ISO 68.

In conjunction with sealing ring, types 107, 170 or 171, protection rating IP68 (5 bar/1 hr).

Sealing ring not contained in the scope of delivery.

\* Prices according to DEL notation.



**CuZn**  
37 Brass

**N** Nickel-plated

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2090511                  |
| Type                               | 168 MS M12               |
| Description 1                      | Screw plug               |
| Manufacturer                       | OBO                      |
| Dimension                          | M12                      |
| Material                           | Brass                    |
| Surface                            | Nickel-plated            |
| Surface standard                   |                          |
| Smallest sales unit                | 100                      |
| Unit of quantity                   | Piece                    |
| Weight                             | 0.39 kg                  |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0096 kg CO2e / 1 Piece |


# Technical data sheet

## Screw plug, metric thread

Item number: 2090511



### Dimensions

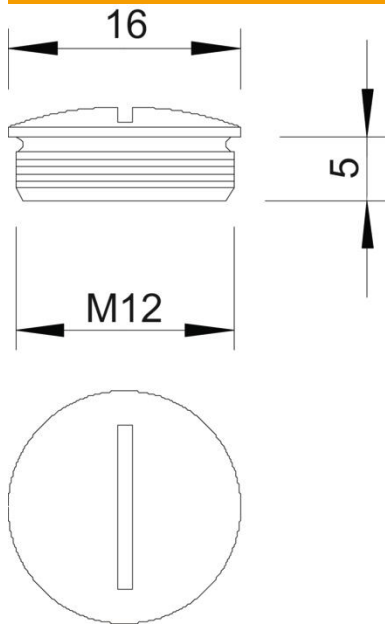

|             |       |
|-------------|-------|
| Length      | 14 mm |
| Width       | 14 mm |
| Height      | 8 mm  |
| Dimension D | 14 mm |
| Dimension L | 5 mm  |

### Technical data

|                               |           |
|-------------------------------|-----------|
| explosion-proof               | no        |
| For Ex zone gas               | Without   |
| For Ex zone dust              | Without   |
| Thread                        | M12 x 1,5 |
| Thread type                   | Metric    |
| Nominal thread size metric/PG | 12        |
| Thread increase               | 1.5 mm    |
| Fibre-glass reinforced        | no        |
| Halogen-free                  | no        |
| Impact-resistant              | no        |
| Protection rating             | IP68      |