

# Technical data sheet

## Double clamp, fitting mounting A2

Item number: 6035998



Double clamp to mount fittings on lockable or screw-on cable trays.



|    |                 |
|----|-----------------|
| A2 | Stainless steel |
| 2B | Bright, treated |

### Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 6035998                   |
| Type                               | DOP A2                    |
| Description 1                      | Double clamp              |
| Description 2                      | for fastening of fittings |
| Manufacturer                       | OBO                       |
| Dimension                          | 42x13x13                  |
| Colour                             | stainless steel           |
| Material                           | Stainless steel 1.4310    |
| Surface                            | Bright, treated           |
| Surface standard                   |                           |
| Smallest sales unit                | 10                        |
| Unit of quantity                   | Piece                     |
| Weight                             | 0.325 kg                  |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0178 kg CO2e / 1 Piece  |


# Technical data sheet

## Double clamp, fitting mounting A2

Item number: 6035998



### Dimensions

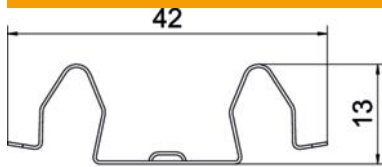

|        |       |
|--------|-------|
| Length | 42 mm |
| Width  | 13 mm |
| Height | 13 mm |



### Technical data

|                                   |                     |
|-----------------------------------|---------------------|
| Maintain electrical functions     | no                  |
| Suitable for mesh cable tray      | no                  |
| Suitable for cable ladder         | no                  |
| Suitable for cable tray           | yes                 |
| Suitable for profile shapes       | Miscellaneous       |
| Adjustable connector, horizontal  | no                  |
| Articulated connector, vertical   | no                  |
| Material thickness                | 0.4 mm              |
| Profile shape                     | Miscellaneous       |
| ROHS-conformant                   | yes                 |
| Rustproof steel, pickled          | yes                 |
| Permitted temperature range, max. | 120 °C              |
| Permitted temperature range, min. | -20 °C              |
| Connection type                   | Screwless connector |