


Technical data sheet

Construction and suspension profile, SL62 FT

Item number: 7103643

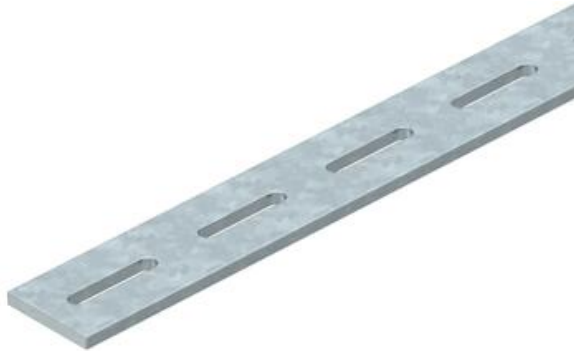

Perforated side rail of ship cable ladder, SL 62, for the creation of suspension and support constructions. Suitable for M8 fastening elements.
The profile is available in bright steel on request.




St Steel

FT Hot-dip galvanised

Master data

Item number	7103643
Type	SLH 62 3000 FT
Description 1	Side rail
Description 2	perforated
Manufacturer	OBO
Dimension	40x5x3000
Colour	zinc
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	135.7 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	3,2748 kg CO2e / 1 Meter

Dimensions

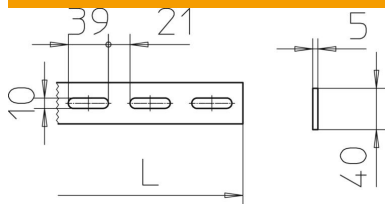

Dimension	40x5
Length	3,000 mm
Width	40 mm
Height	5 mm

Technical data

ROHS-conformant	yes
Rustproof steel, pickled	no