# Technical data sheet

## Add-on tee 60 FT

## Item number: 6042215

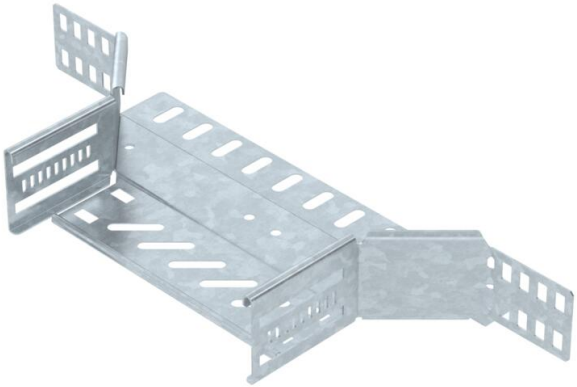

Add-on tee for the creation of a horizontal branch or cross-over, fitting for lock and screw-on cable trays of side height 60 mm. Screwless mounting with double clamps or screw connection with FRS truss-head screws and M6 combination nuts. Can be used indoors and outdoors. Fastening material must be ordered separately.

NEW

St Steel

FT Hot-dip galvanised

### Master data

| | |
|---|---|
| Item number | 6042215 |
| Type | RAA 620 FT |
| Description 1 | Add-on tee |
| Description 2 | for cable tray |
| Manufacturer | OBO |
| Dimension | 60x200 |
| Colour | zinc |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 43.9 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,3667 kg CO2e / 1 Piece |

# Technical data sheet

## Add-on tee 60 FT

## Item number: 6042215

### Dimensions

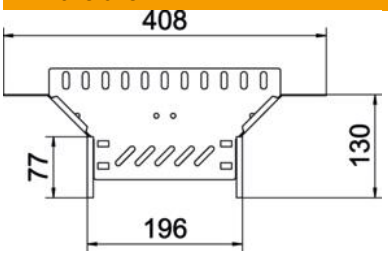


| | |
|---|---|
| Width | 200 mm |
| Height | 60 mm |
| Plate thickness | 0.8 mm |
| Dimension B | 200 mm |

### Technical data

| | |
|---|---|
| Departing width | 200 mm |
| Connector version | Integrated connector |
| Maintain electrical functions | yes |
| Material thickness, floor plate | 0.8 mm |
| NATO hole pattern | no |
| ROHS-conformant | yes |
| Rustproof steel, pickled | no |
| Permitted temperature range, max. | 120 °C |
| Permitted temperature range, min. | -20 °C |
| Wide-span version | no |
| Type of connector, cable support system | screwed/clamped |
| Recommended quantity of bolts | 12 St. |
| Rail thickness | 1.25 mm |